

BID NO= PSB-03



TENDER DOCUMENT

State :-Odisha
District :- Bhadrak
Block :-Bhandaripokhari
Location :-Kochilapadi ,Nammi

**NAME OF THE THE PROJECT: -"Const. of additional classroom at Kochilapadi
Govt. Primary School, G.P-Nammi,"**

Tender Value: - Rs13 ,45 ,058.00

(Rupees Thirteen Lakhs Fourty Five Thousand Fifty eight)

H. M. C.
Asst. Executive Engineer,
B. Pokhari Block

12/12/22
Block Development Officer
Bhandaripokhari



ପଞ୍ଚାୟତସମିତି କାର୍ଯ୍ୟାଳୟ, ଭଣ୍ଡାରିପୋଖରୀ

OFFICE OF THE PANCHYAT SAMITI, BHANDARIPOKHARI

At/P.O.- Bhandaripokhari Dist- Bhadrak, E-Mail- ori-bhandaripokhari@nic.in

Letter no...3175.....

Date...17-05-2025

Tender for Construction of Additional Classroom of Elementary & Secondary School

1. Name of the Work :- Const. of Additional Classroom of Elementary & Secondary School
2. Total No. of Work :- 04 no.s
3. Approximate Estimated Cost :- As per DTCN
4. Class Contractor :- 'C' & 'D'
5. Period of Completion :- Six Calendar Months
6. Other Details :- The Details are as follows

SI NO.	Bid Identification No.	Available Tender On-line for bidding		Last date for receipt of Bids	Date & Time of Opening of Bid
		From	To		
1	2	3	4	5	6
1	PSB-01/2025-26 to PSB-04/2025-26	20.05.2025 10 AM	04.06.2025 5PM	04.06.2025 5PM	05.06.2025 10AM

1. Further details can be seen from the website portal <http://bhadrak.odisha.gov.in>
2. Any other changes/ Corrigendum/Addendum may be seen only in website <http://bhadrak.odisha.gov.in>

12/8
17/5/25
Block Development Officer
Bhandaripokhari

Memo no- 3176 date- 17-05-2025

Copy forwarded to the Manager (Publication) I & PR Department, Government of Odisha, Bhubaneswar with a request to get it published in 2(two) No's of leading Odia daily & 1 (one) no of Local English daily News paper at an early date for wide circulation. The Complementary Copy of the news paper containing the Tender call notice may be sent to this office for reference & record.

12/8
17/5/25
Block Development Officer
Bhandaripokhari



ପଞ୍ଚାୟତସମିତି କାର୍ଯ୍ୟାଳୟ, ଭଣ୍ଡାରିପୋଖରୀ

OFFICE OF THE PANCHYAT SAMITI, BHANDARIPOKHARI

At/P.O.- Bhandaripokhari Dist- Bhadrak, E-Mail- ori-bhandaripokhari@nic.in

Letter no. 3177

Date. 17-05-2025

DETAIL TENDER CALL NOTICE 01/BDO, BHANDARIPOKHARI OF 2025-26

The Block Development Officer, Bhandaripokhari invites a sealed percentage rate tender in single cover system on behalf of Governor of Odisha from registered & eligible class of Civil contractor of the state P W D (R&B) / Water resource / Rural Works / M.I/C.P.W.D for the following works. **The Block Development Officer, Bhandaripokhari reserves the right to reject any or all the tenders without assigning any reason thereof at any stage of the process.** Other details can be seen in **Annexure-1**.

Term & Condition

- 1. Cost of Tender Paper :-** The Tender Specification & document can be obtained from the website <http://bhadrak.odisha.gov.in> & payment towards the cost of Tender papers as mentioned (Non- Refundable) in shape of Demand Draft /Term Deposit to be drawn in favour of Block Development Officer, Bhandaripokhari in any Nationalized Bank having its branch at Bhadrak on any working day **on or before from 20.05.2025 to 04.06.2025** for the above work.
- 2. Date of receipt and mode of submission of Tender Papers:-** The tender papers have to be submitted as sealed tender papers in complete shape through **Registered Post/ Speed Post** only with AD post directly sending it to the BDO Bhandaripokhari in his official postal address. The last date of receipt of tender paper is **04.06.2025 upto 5.00 PM**. The undersigned will not be responsible for postal delay if any non-receipt of the tender papers in time. **The bidders must super scribe the name of the work/project on the sealed envelope with active mobile no.**
- 3. Date of Opening of Tender Paper:-** The tender paper shall be opened on **05.06.2025 at 10.00AM** in the presence of the bidders or in their authorized representative having **written authorization** for the purpose before the tender committee in the conference Hall of Bhandaripokhari Block Office.
- 4. Documents to be attached:-** The following documents should be furnished with the tender paper failing which the tender will be liable for rejection.
 - (A) Self attested copy of contractor Registration Certificate.
 - (B) Self attested copy of PAN card/Certificate of GSTIN.
 - (C) Demand Draft/Term Deposit Receipt of Paper Cost & EMD.
 - (D) Self attested copy of caste certificate issued by competent authorities in case of SC/ST Contractors desirous of availing preference.
 - (E) The bidders must produce an original affidavit in support of the authenticity of documents attached with the tender papers.

- (F) Joint venture consortium agreements are not allowed to participate tender.
5. Shortfall of any required documents and tender paper is liable for rejection.
 6. **E.M.D @1%** of tender value shall be pledged in favour of Block Development Officer along with the bids
 7. **Additional Performance Security Deposit**:- The affidavit in support of APS will be submitted by the successful bidder for the cost of less quoted in percentage of the amount put to tender before signing of the agreement of the contract.(Vide works Department letter No-16659/W dated-20.09.2022 Govt. of Odisha,Works Department) As per office memorandum No-6559 dated-06.06.2021 of Works Deptt., Govt. of Odisha modification to APS will be followed as detailed below:
 8. Submission of more than one tender paper by bidder for a single work will be liable for rejection of all such tender papers.

SI NO.	Range of Difference between the estimated cost put to tender & Bid amount	Additional performance Security to be deposited by the successful Bidder
1	Below 5%	No additional Performance Security
2	From 5% & above & below 10%	50% of (Difference between estimated cost put to tender & Bid amount)
3	From 10% & above	150% of (Difference between estimated cost put to tender & Bid amount)

9. **The Block Development Officer, Bhandaripokhari reserves the right to reject any or all the tenders without assigning any reason thereof at any stage of the process .Other details can be seen in the bidding documents.**
10. If rate quoted by the bidder is less than 15% of the amount put to tender, then such a bid shall be rejected & all the tenders shall be finalized basing of merits of rest bids. But if more than one bid is quoted (decimal upto two numbers will be taken for all practical purposes) either all the estimated cost put to tender or less than the estimated cost put to tender, the tender accepting authority will finalize the tender through a transparent lottery system, where all bidders/ their authorized representative, the concerned SE/Executive Engineer of concerned Division DAO will remain present vide works Deptt O.M No- 1437 dated-31/01/2023
11. **No Tender paper shall be received through Drop Box or Courier Services & tender paper received through Drop Box or Courier Services shall be liable for rejection.**

Memo No- 3178

Date- 17-05-2025

Copy submitted to the Director, I & PR, Govt. of Odisha, Bhubaneswar for favour of kind information.


Block Development Officer
Bhandaripokhari

Memo No- 3179

Date- 17-05-2025

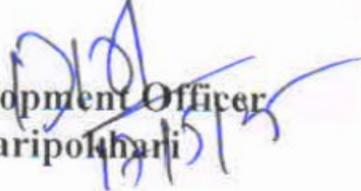
Copy Submitted to The Collector & DM, Bhadrak / CDO-cum-EO, ZP, Bhadrak/ DWO, Bhadrak/ District Planning Officer, Bhadrak /D.I & P.R.O, Bhadrak for favour of kind information & necessary action.


Block Development Officer
Bhandaripokhari

Memo No.- 3180

Date- 17-05-2025

Copy forwarded to EE, Bhadrak/ EE, R.W.S & S, Bhadrak, EE R & B Divison, Bhadrak/ EE,M.I. Divison, Bhadrak/EE,R.W Divison, Bhadrak/ All BDOs of Bhadrak District/ Tahasildar, Bhandaripokhari/ IIC, Bhandaripokhari, Bhandaripokhari PS/ CDPO, ICDS, Bhandaripokhari for information & necessary action with request to display in their Notice board for wide circulation.


Block Development Officer
Bhandaripokhari

Memo No- 3181

Date- 17-05-2025

Copy forwarded to The DeGM, Bhadrak for information with a request to upload the detail tender call notice, tender schedule and the bid documents in the official website of Bhadrak i.e <http://bhadrak.odisha.gov.in>


Block Development Officer
Bhandaripokhari

Memo No- 3182


Date- 17-05-2025

Copy to Office Notice Board & C.P, Bhandaripokhari Block to assist for uploading the DTCN & bid documents at NIC, Bhadrak.


Block Development Officer
Bhandaripokhari

Annexure-1


BID IDENTIFICATION NUMBER	NAME OF THE WORK	APPROXI. EST COST PUT TO TENDER	CLASS OF CONTRACTOR	EMD(1%) Approx.	COST OF TENDER PAPER	TIME OF COMPLETION
2	3	4	5	6	7	8
PSB-01/2025-26	Const. of additional classroom at Ragunathpur Govt U.P School , G.P-Malda	13,44,230.00	'C' & 'D'	Rs.13,500	Rs.6,000/-	SIX CALENDAR MONTH
PSB-02/2025-26	Const. of additional classroom at Ranipada Govt Primary School, G.P-Sanasasana	13,43,263.00	'C' & 'D'	Rs.13,500	Rs.6,000/-	SIX CALENDAR MONTH
PSB-03/2025-26	Const. of additional classroom at Kochilapadi Govt Primary School, G.P-Nammi	13,45,058.00	'C' & 'D'	Rs.13,500	Rs.6,000/-	SIX CALENDAR MONTH
PSB-04/2025-26	Const. of additional classroom at Anchalika Girls High School, Saradapur G.P-Jalamandua	15,04,861.00	'C' & 'D'	Rs.15,500	Rs.6,000/-	SIX CALENDAR MONTH



 Block Development Officer
 Block Development Officer
 Bhandaripokhari
 Bhandaripokhari

Abstract of (Bill of Quantity) for Const. of ACR at Kochilapadi Primary school, Village- Kochilapadi, GP-Nammi, Block-Bhandaripokhari, Dist-Bhadrak

Sl.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
					(Rs.)
Part - A Civil Cost)					
1	Foundation excavation in hard soil including levelling and dressing the bed and sides depositing muck within initial lead and lift etc. complete as per direction of Engg-in-Charge .	18.340	Cum.	270.89	4,968.12
2	Filling foundation and plinth with sand and well watered and rammed including cost, conveyance and royalty etc complete as per direction of Engg.-in-Charge.	36.560	Cum.	652.57	23,857.96
3	Cement concrete (1:3:6)with 40mm size CBHG metal including cost, conveyance and royalty etc. complete as per direction of Engg.-in-Charge.	9.410	Cum.	6,235.82	58,679.07
4	Fly Ash Brick masonry in c.m. 1:6 in F & P including cost,conveyance and royalty of materials curing etc. complete. as per the direction of the Engineer-in-charge.	11.100	Cum.	5,685.56	63,109.72
5	1" thick D.P.C with C.C(1:2:4) using 12mm. Chips etc. complete as per direction of Engg-in-Charge .	9.738	Sqm	365.71	3,561.10
6	1st class Fly Ash brick masonry work in superstructure thoroughly soaked in water, with cement mortar (1:6) including scaffoldings ,racking out joints, curing etc complete as per specification/drawing and as per the direction of the Engineer-in-charge.				
	i Ground Floor Floor	8.670	Cum.	5,718.89	49,582.78
7	R.C.C. work M20 grade using 20mm.and down grade HBG crusher broken chips including hoisting,laying, cost,conveyance and royalty of materials curing including centering and shuttering etc. complete as per direction of Engg-in-Charge .				
	i Column Base				
	a Ground Floor	5.500	Cum.	6,877.61	37,826.86
	ii Plinth Beam / Tie Beam				
	a Ground Floor	2.300	Cum.	7,748.45	17,821.44
	iii Beam & Column				



Junior Engineer
Bhandaripokhari Block



Asst. Executive Engineer
Bhandaripokhari Block


Block Development Officer
Bhandaripokhari Block

Sl.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT (Rs.)
a	Ground Floor	7.300	Cum.	16,010.56	1,16,877.09
iv	65mm avg. Chajja				
a	Ground Floor	11.400	Sqm.	1,235.72	14,087.21
v	Roof Slab				
a	Ground Floor	8.460	Cum.	13,894.80	1,17,550.01
vi	Lintel				
a	Ground Floor	1.020	Cum.	14,481.46	14,771.09
8	Single under reamed pile foundation with RCC M20 using 25mm and down graded size black hard granite (Crusher broken) stone chips including cost of boring but excluding cost of M.S./Tor steel and labour charges for cutting, bending and binding of steel. etc. complete 300mm pile - 6.00m long	20	Pile	5,946.35	1,18,927.02
9	Supplying, fitting and placing uncoated HYSD bar reinforcement complete in proper position including cost of binding wire 18 to 20 gauge as per direction of Engg.-in-Charge.				
i	Ground Floor	37.460	Qtl	9,068.35	3,39,700.39
10	12mm cement plaster in cement mortar (1:6) including necessary scaffolding curing etc. as per direction of Engg.-in-Charge.				
i	Ground Floor	73.600	Sqm	188.01	13,837.54
11	16mm thick cement plaster in cement mortar (1:6) including necessary scaffolding curing etc. as per direction of Engg.-in-Charge.				
i	Ground Floor	79.900	Sqm	270.93	21,647.31
12	6mm.thick cement plaster with C.M(1:4) to RCC surface including closed deep chipping and slury treatment etc. complete as per direction of Engg.-in-Charge.				
i	Ground Floor	81.860	Sqm	210.86	17,261.00
13	Fixing colour Vitrified tiles in floors (Printed Series) of size 600mm x600 mm of approved make conforming IS:13755 laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all materials, labour T&P etc rrequired for the work all completeas per direction of Engineer-in-charge.				
i	Ground Floor	56.930	Sqm	1,142.21	65,026.02


Junior Engineer
Bhandaripokhari Block


Asst. Executive Engineer
Bhandaripokhari Block


Block Development Officer
Bhandaripokhari Block


Sl.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
					(Rs.)
14	Fixing Vitrified tiles in dados (Printed Series) skirting and risers of stepson 12 mm thick cement plaster(1:3) jointed with neat cement slurry mixed with pigments to matche shade of the tiles including rubbing and polishing complete as per direction of Engineer-in-charge.				
	i Ground Floor	5.640	Sqm	1,305.59	7,363.53
15.	Wall Priming one coats on new work with wall water bound primer of approved shade as per direction of Engg-in-Charge .				
	i Ground Floor	229.720	Sqm	76.72	17,624.12
16.	Wall painting two coats on new work with Distemper of approved shade etc. complete as per direction of Engg-in-Charge .				
	i Ground Floor	128.760	Sqm	89.26	11,493.12
17.	Finishing wall surface of walls with Acrylic wall putty (Water based) of approved make and finished smooth and even surface to receive painting including cost of scaffolding staging charges with cost of all materials taxes, labour T & P etc. complete as per direction of Engg-in-Charge .				
	i Ground Floor	128.760	Sqm	89.84	11,567.80
18.	Wall painting two coats on new work with Weather coat paint of approved shade as per direction of Engg.-in-Charge.				
	i Ground Floor	100.960	Sqm	97.19	9,812.00
19.	Supplying ,fitting and fixing of MS steel shutter with frame with MS angle frame of 35x35x6mm and shutter section of 30x30x5mm MS angle with welding of 25x6mm flat and welding of 16 gauge CR sheet witharrangement of clamp, fitting of 3 nos of 4" hinges and 300mm x16 mm MS aldrop with 8" Tower bolt including cost, conveyance, and taxes of all materials, labour , T&P etc required for complete in all respect.				
	(i) All Floors	468.000	Kg.	116.79	54,657.72
20	Eamel Painting two coats with enamel paint over one coat of primer of approved quality etc. complete as per direction of Engg-in-Charge .				
	i Ground Floor	29.160	Sqm	330.62	9,640.88
21	20mm. thick grading plaster in c.m. 1:4 over roof slab and chujja including cost conveyance and royalty of materials curing etc. complete as per direction of Engg-in-Charge .				
	i Ground Floor	68.850	Sqm	295.87	20,370.31


[Signature]
Junior Engineer
Bhandaripokhari Block


[Signature]
13/1/25
Asst. Executive Engineer
Bhandaripokhari Block

15/1/25
13/1/25
Block Development Officer
Bhandaripokhari Block

Sl.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
					(Rs.)
22	Supplying, fitting & fixing of stainless steel of 304 grade in Hand Railing using 50mm. Dia of 2mm. thick circular pipe with Balustrade of size 32mm.x32mm.x2mm. @ 0.90m. C/C and stainless square pipe bracing of size 32mm.x32mm.x2mm. In 3 rows in stair case as per approved design and specification, buffing, polishing etc. with cost, conveyance, taxes of all materials labour T & P etc. required for the completion in all respect etc. complete as per direction of Engg-in-Charge .	6.100	Mt.	3,589.59	21,896.50
23	Fixing industrial Chequered tiles in floors, treads or steps and landings on 25 mm thick CM (1:1) jointed with neat cement slurry mixed with pigments to match the shades including cost for rubbing, polishing & cost of tiles etc. complete as per direction of Engg-in-Charge .				
	(i) Ground Floor	20.140	Sqm.	1,319.23	26,569.29
				Subtotal -A	12,90,087.00



Junior Engineer
Bhandaripokhari Block



Asst. Executive Engineer
Bhandaripokhari Block


Block Development Officer
Bhandaripokhari Block

Sl.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
					(Rs.)
Part - B(Electrification)					
24	Recessed wiring to light point / fan point / exhaust fan point / call bell point with 1.5 sq.mm FR PVC insulated single core multistrand copper conductor of ISI marked with 20 mm dia non-metalic PVC flexible conduit with 5 Amp, 250 V modular type switch ISI marked and ceiling rose ISI marked mounted on MS box having front modular cover of suitable size , MS modular box with 1.0 sq.mm FR PVC insulated single core multistrand copper conductor as earth wire including all accesories and connection as per direction of Engineer in Charge. (Make of wire Finolex / L&T / Anchor / Havels / V Guard)				
	i Group-A	7.000	point	548.43	3,839.01
	ii Group-B	4.000	point	841.98	3,367.92
	iii Group-C	4.000	point	1,214.80	4,859.20
25	Recessed wiring to submain in 2 x 1.5 sq.mm FR PVC insulated single core multistrand copper conductor of ISI marked confirming to IS-694/1990 in 20 mm dia non-metalic heavy duty flexible conduit 1.6 mm thick along with 1 x 1.5 sq.mm FR PVC insulated single core multistrand copper conductor as earth wire as equired.(Make of wire Finolex/L&T/Anchor/Havels/V Guard)	20.000	m	155.58	3,111.60
26	Recessed wiring to Submain with 2 x 2.5 sq. mm. FR PVC insulated single core multistrand copper conductor of ISI marked with 20 mm dia non-metalic PVC flexible conduit along with with 1 x 1.5 sq.mm FR PVC insulated single core multistrand copper conductor as earth wire as tequred as per direction of Engineer in Charge. (Make of wire Finolex / L&T / Anchor / Havels / V Guard)	25.000	m	171.09	4,277.25
27	Supply and fixing of 3 no.sof 3pin 5/6 amp modular socket and S.P. 5/6 amp one way modular switch, 1 no. of 5 pin 15/16 socket out let and S.P. 15/16 A one way modular switch on Modular G.I. Box with Modular Base and cover..(Make of wire Finolex/L&T/Anchor/Havels/V Guard)	3.000	No	1,489.86	4,469.58


Junior Engineer
Bhandaripokhari Block


Asst. Executive Engineer
Bhandaripokhari Block


Block Development Officer
Bhandaripokhari Block

SI.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
					(Rs.)
28	S/F SP MCB DISTRIBUTION BOARD ISI MARKED Supply and fixing of single pole MCB with sheet steel enclosure, distribution board, on surface / recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, detachable gland plate, interconnection, phosphate and powder painted including earthing etc. as required (But with out MCB/ RCCB/ ISOLATOR) 4 WAY, SINGLE DOOR	1.000	No	930.19	930.19
29	Supply and fixing of 5 amp to 32 amp rating 240 V "B" series miniature circuit breaker suitable for lighting and other loads of the following poles in the existing MCB DB ISI marked complete with connections testing and commissioning etc. as required.	4.000	No	143.54	574.16
30	Providing and fixing of following capacity TP& N disconnecter fuse switch unit inside existing cubical panel board with ISI marked HRC fuses including drilling holes in cubical pannel, makinfg connection etc as required. as per direction of Engineer in Charge. Make- EIMENS/HPL/ANCHOR/ L&T/HAVELS/C & S/ RK	1.000	No	1,730.25	1,730.25
31	G.I. Earth Pipe electrode with salt / charcoal Earthing with G.I earth pipe 3 meter long 40 mm dia ISI marked including accessories and providing masonry enclosure with cover plate having locking arrangment and watering pipe etc with charcoal and salt as required as per direction of Engineer in	1.000	No	2,786.31	2,786.31
32	S/F of 48" Ceiling fan Alluminium Body, Copper winding, High speed ceiling fan (Make-Crompton Model- as required as per direction of Engineer in Charge.	4.000	No	2,619.13	10,476.52
33	S/F of 1x18 Watt LED T-5 fitting(Make-Crompton/Philips/Havells/Bajaj) as required as per direction of Engineer in Charge.	8.000	No	781.24	6,249.92
34	S/F of 18 Watt LED Square surface mount fitting (Make-Havells/Philips/C&S/Crompton) as required as per direction of Engineer in Charge.	4.000	No	1,250.99	5,003.96


[Signature]
Junior Engineer
Bhandaripokhari Block


[Signature]
13/1/25
Asst. Executive Engineer
Bhandaripokhari Block


[Signature]
13/1/25
Block Development Office:
Bhandaripokhari Block

Sl.	DESCRIPTION	QTY	UNIT	RATE	AMOUNT
					(Rs.)
35	Providing and fixing M.V danger board of 250 mm x 150 mm made mild steel at least 2 mm thick and vitreous enameled white on both sides and with inscription in single red colours on front side as required. as per direction of Engineer in Charge.	1.000	No	176.96	176.96
36	S/L of 8 SWG copper wire in ground Supplying and laying 8 SWG copper wires ISI marked at 0.5 meter below ground level for conductor earth electrode including soldering etc. as required as per direction of Engineer in Charge.	9.000	Mt.	109.05	981.45
37	Supply of PVC Aluminium armored cables ISI marked. (Make- Glowstar/ Polycab/Nicco/KEI on surface as required as per direction of Engineer in Charge. 10 sq mm 4 core PVC Armoured cables ISI marked	10.000	Mt.	213.67	2,136.70
				Subtotal -B	54,970.98
					GRAND TOATL =A+B=1290087.00+54971.00=RS13,45,058.00
					(RUPEES THIRTEEN LAKHS FOURTYFIVE THOUSAND AND FIFTY EIGHT) ONLY


 JE/AE
 BHANDARIPOKHARI BLOCK
 Junior Engineer
 Bhandaripokhari Block


 AEE
 BHANDARIPOKHARI BLOCK
 Asst. Executive Engineer
 Bhandaripokhari Block


 BDO
 BHANDARIPOKHARI BLOCK
 Block Development Officer
 Bhandaripokhari Block


 Addl. Executive Officer(Tech.)
 Zilla Parishad, Bhadrak

Name of the work: - Const. of additional classroom at Kochilapadi Govt Primary School, G.P-Nammi Block-Bhandaripokhari, Dist-Bhadrak

Total 37(thirty seven) Items Only

My / our quoted rate is _____% (both in figures and words) excess over / less than / equal to the above estimated cost.

Signature of Contractor /Tenderer

Notes:-

1. The contractor should not write anything excepting quoting of percentage and in case anything else regarding tender rate is mentioned, the tender is liable for rejection.
2. Strike out which is not applicable.
3. Percentage should be quoted up to 2 (two) digits after the decimal point.
4. Rate of all Items are inclusive of cost, carriage, royalty and other taxes of material.

Tenderer

No of corrections _____

No of over writings _____

No of interpolations _____

Asst. Executive Engineer,
B. Pokhari Block

12/12/25
12/15/25
Block Development Officer
Bhandaripokhari